




TGB1NLE-32 (63) Series Residual Current Circuit Breaker

1 Product overview

TGB1NLE-32(63) series residual current circuit breaker with overcurrent protection (hereinafter referred to as leakage circuit breaker) is mainly used in AC 50Hz line with rated working voltage 230V/400V and rated current up to 63A. In case of personal electric shock or when the grid leakage exceeds the specified value, the residual current circuit breaker can quickly cut off the power supply in a very short time for protection of the safety of people and electrical equipment, for overload, short circuit, and overvoltage protection and infrequent conversion of the line under normal conditions, especially suitable for industrial and commercial lighting distribution systems.

2 Type designation

TG B 1N LE - 63 1P+N C 16 30mA

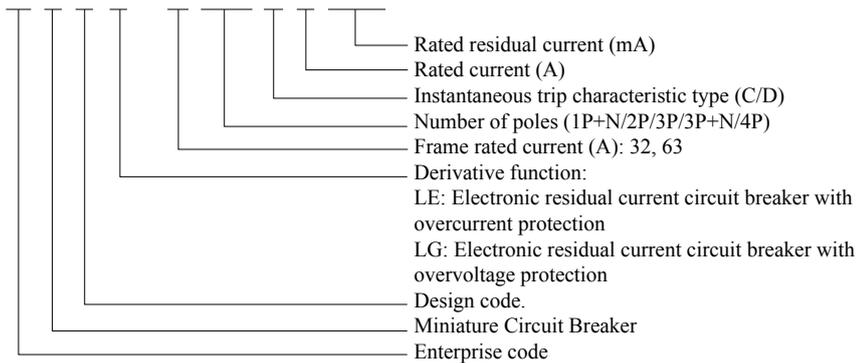

3 Product parameters

3.1 The main technical parameters of the product (see Table 1)

Table

Product name	TGB1NLE-32	TGB1NLE-63
Standards	IEC61009-1	
Product certification	CE	
Electrical characteristics		
Number of poles	1P+N, 2P, 3P, 3P+N, 4P (N pole normally open)	1P+N, 2P, 3P, 3P+N, 4P (N pole normally open)
Rated frequency (Hz)	50	
Frame rating current (A) I_{nm}	32	63
Rated current (A) I_e	6, 10, 16, 20, 25, 32	40, 50, 63
Rated voltage (V) U_e	AC230(1P+N, 2P) AC400(3P, 3P+N, 4P)	AC230(1P+N, 2P) AC400(3P, 3P+N, 4P)
Rated insulation voltage (V) U_i	690	
Rated impulse withstand voltage (kV) U_{imp}	4	
Rated short-circuit breaking capacity (kA) I_{cs}	6	
Rated short-circuit breaking capacity (kA) I_{cn}	6	
Instantaneous trip characteristics	C(5In ~ 10In) D(10In ~ 14In)	C(5In ~ 10In) D(10In ~ 14In)
Trip form	Thermal magnetic trip	
Pollution level	2	
Electrical and mechanical accessories	MX: Shunt release OF: Auxiliary contact SD: Alarm contact MX+OF: Shunt release + auxiliary contact MV: Overvoltage release MN: Undervoltage release MV+MN: Overvoltage and undervoltage release	MX: Shunt release OF: Auxiliary contact SD: Alarm contact MX+OF: Shunt release+ auxiliary contact MV: Overvoltage release MN: Undervoltage release MV+MN: Overvoltage and undervoltage release
Rated residual current (mA) $I_{\Delta n}$	15, 30, 50, 75, 100, 300	30, 50, 75, 100, 300
Maximum breaking time at rated residual current	0.1s	

TGB1NLE-32 (63) Series Residual Current Circuit Breaker

Table 1, Continued

Product name	TGB1NLE-32	TGB1NLE-63
Overvoltage protection: Uvo=280V±5%	√	√
Mechanical properties		
Electrical life	10000	10000
Mechanical life	20000	20000
Protection grade	IP20	IP20
Normal operation conditions and installation characteristics		
Ambient temperature	-35℃~+70℃	-35℃~+70℃
Installation site altitude	≤2000m	≤2000m
Terminals	Fixed with screw	Fixed with screw
Maximum wiring capacity (mm ²)	16	16
Maximum limit torque (Nm)	2	2
Installation category	Class II, III	Class II, III
Installation method	35mm standard rail	35mm standard rail
Incoming method	Upper and lower	Upper and lower


3.2 Action characteristics of circuit breaker overcurrent release (see Table 2)

Table 2


No.	Test current (A)	Start state	Set time	Expected outcome	Remarks
a	1.13In	Cold state	t ≤ 1h	No trip	The current rises to the specified value within 5s
	1.45In	Followed by 1.1.3In test	t < 1h	trip	
	2.55In	Cold state	1s < t < 60s (For In ≤ 32A) 1s < t < 120s (For In ≤ 32A)	trip	
c	5In	Cold state	t ≤ 0.1s	No trip	Turn on the auxiliary switch for making current
	10In	Cold state	t < 0.1s	trip	
d	10In	Cold state	t ≤ 0.1s	No trip	Turn on the auxiliary switch for making current
	14In	Cold state	t < 0.1s	trip	

Note: The cold state refers to the temperature 30℃ without load before the test.

3.3 Protection characteristic curve of circuit breaker

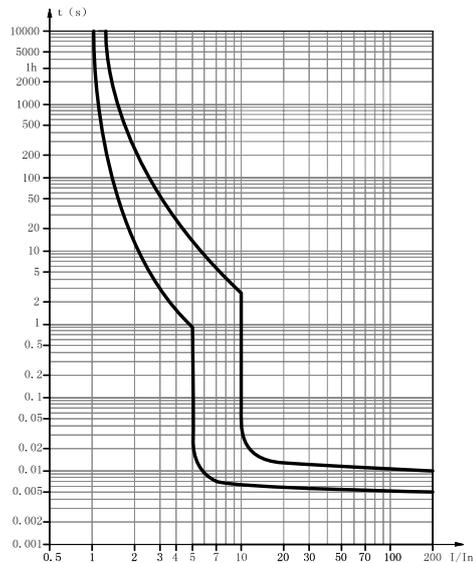

C Type protection characteristic curve

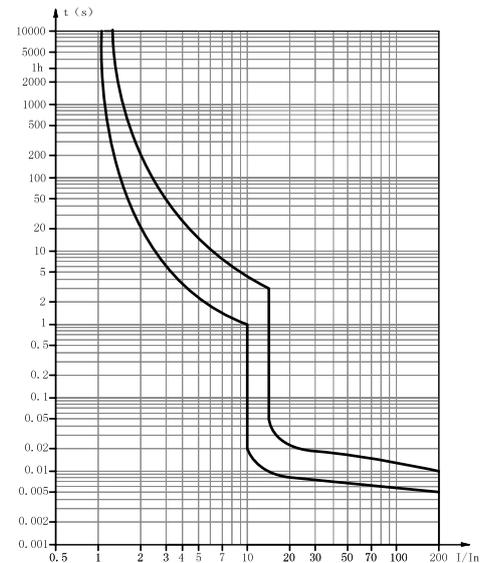

D Type protection characteristic curve


TGB1NLE-32 (63) Series Residual Current Circuit Breaker

3.4 Wiring: Suitable for wire connection of 25mm² and below (see Table 3). The wiring method is that the wire is fixed with screws according to the tightening torque 2.5N·m.

Table 3

Rated current (A)	Cross area of wire (mm ²)
6	1
10	1.5
16 ~ 20	2.5
25	4
32	6
40 ~ 50	10
63	16

4 Outline and installation dimensions

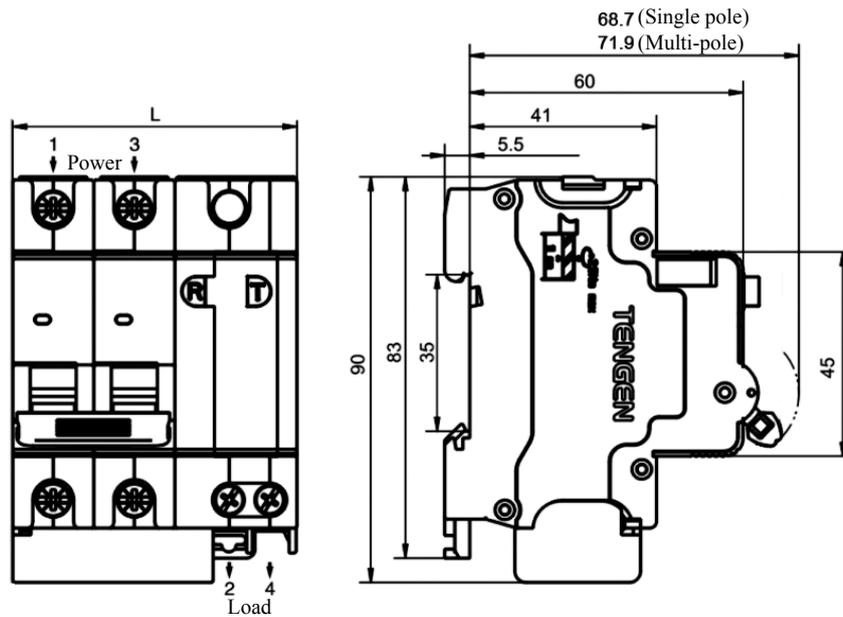

TGB1NLE-32 (63) Series Residual Current Circuit Breaker

Table 4

Model	Number of poles	L(mm)
TGB1NLE(LG)-32	1P+N	45
TGB1NLE(LG)-63	1P+N	54
TGB1NLE(LG)-32	2P	63
TGB1NLE(LG)-63	2P	72
TGB1NLE(LG)-32	3P	90
TGB1NLE(LG)-63	3P	103.5
TGB1NLE(LG)-32	3P+N	99
TGB1NLE(LG)-63	3P+N	117
TGB1NLE(LG)-32	4P	117
TGB1NLE(LG)-63	4P	135

5 Order Information

- 5.1 Product model and name, such as: TGB1NLE-32 residual current operated circuit breaker
- 5.2 Trip type, such as: C type
- 5.3 Number of poles of product, such as 2P
- 5.4 Rated current, such as 10A
- 5.5 Rated residual operating current, such as: 30mA
- 5.6 Order quantity, such as: 50 units
- 5.7 Order example: TGB1NLE-32 2P C10 30mA, 50 units